


Installation example with safety knuckle bend, 41 mm (item no. 2501) using the adapter, type 3600 with the 90° safety knuckle bend and the BVC-PP pipes, 50 mm dia for walls < 12 cm.

low-voltage contact component




adjustable screw
for low-voltage
contact case

fixing screws for
low-voltage/cable

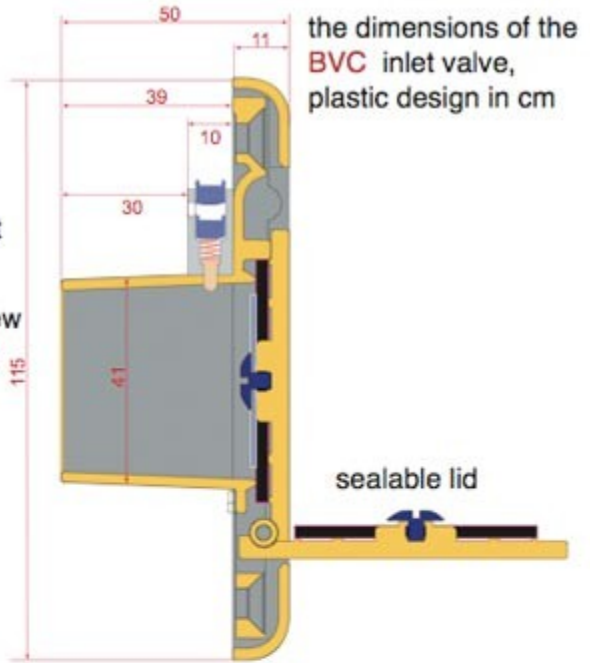

the dimensions of the
BVC inlet valve,
plastic design in cm

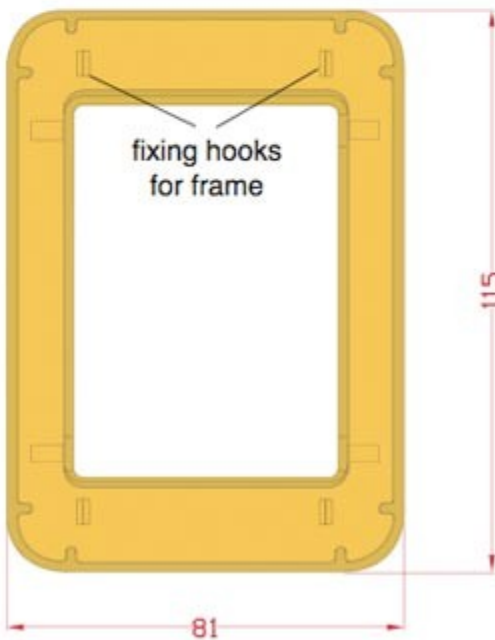

fixing hooks
for frame



back view of inlet valve